

TPWX2GD

TPWX2GD "HAZARDOUS ZONE" SERIES PALLET TRUCK SCALE ATEX



Pallet truck scales, with built-in electronic weighing, for dangerous areas classified as hazardous (ZONES 1 and 21 & 2 and 22) in accordance with Ex II 2GD IIB T4 T197°C X. The ATEX certified four load cell weight detection IP68 guarantees the best accuracy in all work conditions. Available also CE-M APPROVED.

Working in cooperation with:

UAB DESKA

KLONALIŲ K. - ZALGIRIO SEN. - 97144 - KRETINGOS RAJ. LITHUANIA
Tel. 00370-46-381089 Fax. 00370-445-76466
info@deska.lt

The best solution
for advanced industrial
applications

MAIN FEATURES

- Maximum lifting capacity: 2500 kg.
- Accuracy: +/- 0.05% of the maximum capacity.
- Fork dimensions 1150 x 550 x 85 mm.
- Weighs about 125 kg.
- Bearing structure in extra thick sheet steel and oven-fire painted interior construction.
- Standard fitted swivelling column head.
- Steering wheels and double loading rollers with a poliurethane coating.
- Atex certified, 4 stainless steel IP68 shear-beam load cells.
- Indicator with easy to clean satined stainless steel case with IP68 enclosure built to withstand humid and dusty environments; large LCD display 25-mm high contrast digits which are clearly visible even in poor lighting conditions; 17-key numerical/functional membrane waterproof keyboard.
- Calibration and Set-Up parameters configurable from keyboard.
- Power supply through extractable battery, rechargeable in safe zone.
- 150-hour approximate operating time.
- Equipped with 230Vac 50 Hz battery charger to be recharged in a safe area.


MAIN FUNCTIONS

- Zeroing, Tare
- High Resolution Weighing x 10
- Net/Gross or lb/kg conversion
- Weighs accumulation
- Formulation
- Counting
- Hold

AVAILABLE UPON PRICE ESTIMATE

- 680 mm fork width.
- Special fork length from 850 to 1500 mm.
- Special capacity e/o divisions.
- High resolution.

DETAIL 1

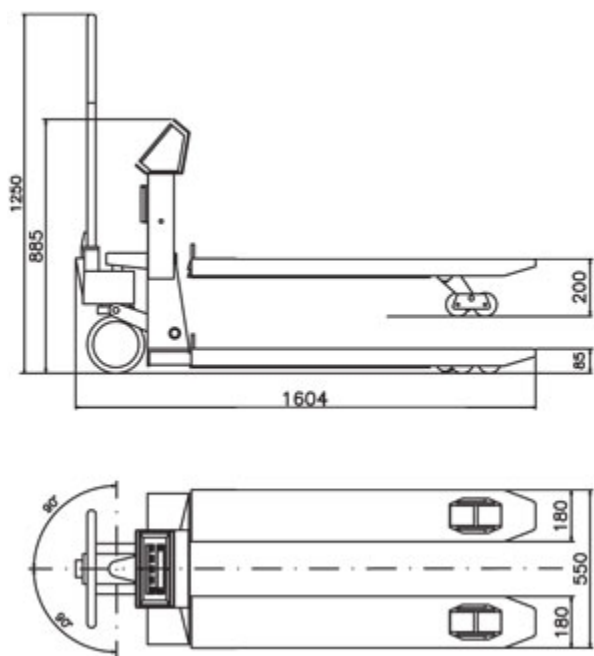

Dimensions in mm.

VERSIONS

Versioni disponibili

Codice	Max (kg)	d (kg)	M (kg)	d HR (kg) *
TPWX2GD20	500/1000/2000	0,2/0,5/1	--	0,1/0,2/0,5
TPWX2GD20M M	1000/2000	--	0,5/1	--
TPWX2GD25	600/1500/2500	0,2/0,5/1	--	0,1/0,2/0,5
TPWX2GD15M M	600/1500	--	0,2/0,5	--
TPWX2GD25M M	1500/2500	--	0,5/1	--

(*) Divisione HR disponibile con la relativa opzione EHR.



www.diniargeo.com



DINI AR GEO
FRANCE sarl
Nogent-sur-Marne

DINI AR GEO
GMBH
Sinsheim - Germany

DINI AR GEO
UK Ltd
Taunton - United Kingdom

DINI AR GEO WEIGHING
INSTRUMENTS Ltd
Shanghai - China

DINI AR GEO
WEIGHBRIDGES
Calto (RO) - Italy



HEAD OFFICE
Via Della Fisica, 20
41042 Spezzano di Fiorano Modena - Italy



UAB DESKA

KLONALIUS K. - ZALGIRO SEN. - 97144 - KRETINGOS RAJ. LITHUANIA

Tel. 00370-46-381089 Fax. 00370-445-76466

info@deska.lt

SALES AND TECHNICAL ASSISTANCE SERVICE