

## TRD

### TRD IP65 STAINLESS STEEL PRECISION SCALES SERIES



High resolution IP65 stainless steel balances for industrial and laboratory use. Particularly suitable where there are strict hygiene requirements. The dual range models have a higher accuracy on the lower part of the range. CE-M APPROVED also available.

---

DIVISION (g): from 0.1 to 1. CAPACITY (g): from 2000 to 12000.

---

Working in cooperation with:

**UAB DESKA**

KLONALIŲ K. - ZALGIŲ SEN. - 97144 - KRETINGOS RAJ. LITHUANIA  
Tel. 00370-46-381089 Fax. 00370-445-76466  
info@deska.lt

The best solution  
for advanced industrial  
applications

## MAIN FEATURES

- LED display: 7 bright red segments with 7 digits, 15 mm high, for viewing the weight and 6 LEDs for showing the active functions.
- Waterproof keypad with 8 functional keys.
- Stainless steel structure.
- Stainless steel plate, 190x220mm size.
- Functions with aluminium "single point" load cell, with anticorrosive treatments.
- Protection from dust and water splashes according to IP65 standards.
- Adjustable feet and level.
- Digital calibration & set-up configurable from keyboard.
- 12 Vdc power supply with an external 230 Vac power adapter.

## SELECTABLE FUNCTIONS:

- Counting
- Totalisation / Formulation with management of 3 zeroable and printable totals independent from each other (partial total, general total, grand total).
- +/- Tolerance check
- Percentage Weigh
- Programmable Set point available for all the functioning modes.

## KEYPAD FUNCTIONS:

- Zero, Tare, Print, Mode, On-Off/Clear and 3 navigation keys


## I/O SECTION:

- RS232/C or TTL bidirectional output for connection to printer or remote display.
- Bi-directional RS232/C or RS485 configurable output for PC, PLC and additional remote display.

## OPTIONS ONLY AVAILABLE AT TIME OF ORDER

- Internal rechargeable battery
- I/O expansion with 2 inputs and 2 relay outputs (upon price estimate)
- Time/Date or Alibi memory with Time/Date

## DETAIL 1

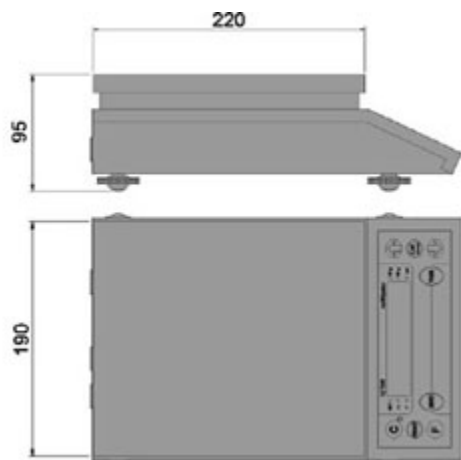

dimensions in mm

## VERSIONS

Versioni disponibili

Codice	Max (g)	d (g)	<b>M</b> 2R (g) *	Linearità (g) +/-
TRD6500	6.500	0,1	--	0,15
TRD10K2	2.000/10.000	0,1/1	--	0,2/1
TRD6DM <b>M</b>	3.000/6.000	--	0,5/1	--
TRD12DM <b>M</b>	6.000/12.000	--	1/2	--



www.diniargeo.com



“YOUR WORLDWIDE PARTNER FOR WEIGHING,”

DINI ARGEO  
FRANCE sarl  
Nogent-sur-Marne

DINI ARGEO  
GMBH  
Sinsheim - Germany

DINI ARGEO  
UK Ltd  
Taunton - United Kingdom

DINI ARGEO WEIGHING  
INSTRUMENTS Ltd  
Shanghai - China

DINI ARGEO  
WEIGHBRIDGES  
Calto (RO) – Italy



HEAD OFFICE  
Via Della Fisica, 20  
41042 Spezzano di Fiorano Modena - Italy



### **UAB DESKA**

KLONALIŲ K. - ZALGIŲ SEN. - 97144 - KRETINGOS RAJ. LITHUANIA

Tel. 00370-46-381089 Fax. 00370-445-76466

info@deska.lt

SALES AND TECHNICAL ASSISTANCE SERVICE