



IT6000E BATCH

Universal Multi-Ingredient Batchweighing Control

IT6000E BATCH is a batchweighing controller for automatic weighing of solid and liquid materials in the **chemical, pharmaceutical, food and other industries**.

The controller connects to load cells or scales of all types and weight ranges, including Ex-area applications.

IT6000E BATCH is suitable for:

- Automatic multi-ingredient batchweighing in hoppers, mixers or tanks
- Recipe batchweighing on floor and pit-mounted scales including control of manually added ingredients
- Subtractive batchweighing (weighout) from hopper scales.

The system controls fast and dribble feed of **valves, screw feeders or similar for up to 31 materials**.

Batching sequences are recipe-controlled.

Recipes contain functions for automatic or manual weighing, weight tolerance check, operator inputs and synchronization steps.

Production and processing procedures can also be included into an automatic cycle, simply, safely and fast.

The controller offers functionality to conform with ISO 9001 standards:


- **Accurate fill control** through fast signal processing, trend-sensing preact adjustment and weight tolerance control
- **High operational security** through extensive monitoring functions and simple operation via onscreen menus

- Operator prompting and permanent indication of status with **clearly structured menus on color screen** ensure fast and error-free operation and minimum training requirements
- **Recording of all data** in a batch log, totals for raw material usage, production quantities and error reports.

The controller is available in two styles:

- **Compact stainless steel enclosure** for desk-top or wall mounting, or
- **Panel-mount housing.**

Typical Setting:

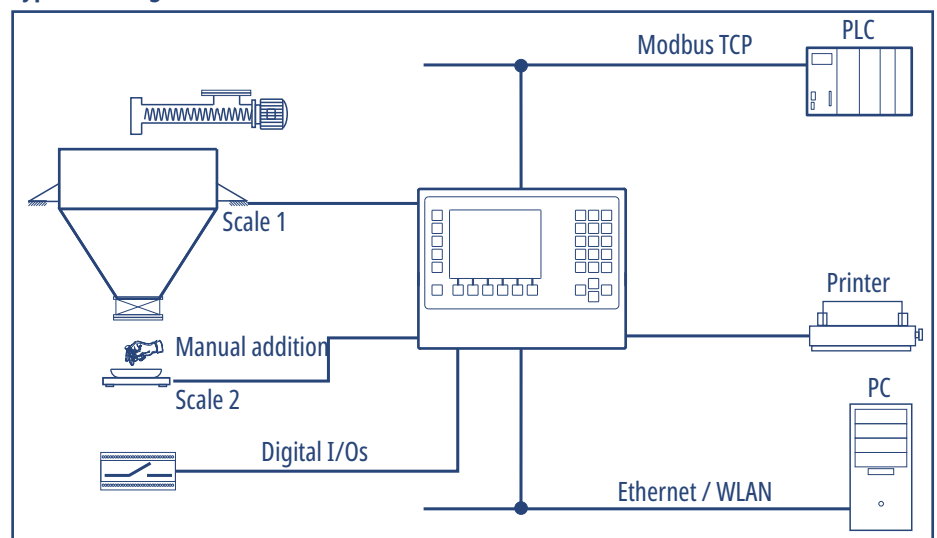

IT6000E BATCH is designed for:

- **Semi-automatic operation,**
as stand-alone batchweighing controller with its own recipe and raw material database, or
- **Automatic operation,**
linked to a process control system or PLC with database maintenance and overall process control.

Sequence and operation are configurable and can be adapted to the requirements of a specific application.

Typical sequence in semi-automatic operation

To start a batch, batch size, number of batches and, possibly, application-specific data are keyboard entered. The sequence is started via the keyboard or from an external signal.

A batch log is printed at the end of each batch.

Error messages are displayed in clear text and printed out on a printer (if connected).

W1	Max 300 kg	Min 2.0 kg	e=0.1 kg
W1		0.0 kg	
Tare		0.0 kg	
Manual Mode			
Operator no	1234 John O. Public		
Recipe no	000001 Pancake mix		
Target	31.200kg		
No of Batches	1		
Batch	1	Start ?	
Exit			

Entry of target values

W2	Max 3 kg	Min 0.020 kg	e=0.001 kg
W2		1.093 Net kg	
Tare		0.195 kg T	
Recipe	000001 Pancake mix		
Batch	1/ 1	31.200kg	Pos. 1/ 3
Mat.	M000000003 Salt		
Target	1.200 kg		
Remaining	-0.107 kg		
0%	50%	-	91.1%
Chg pot	Chg lot	Tare	X10 Abort



Manual weighing with bargraph display

W1	Max 300 kg	Min 2.0 kg	e=0.1 kg
W1		24.1 kg	
Tare		0.0 kg	
Recipe	000001 Pancake mix		
Batch	1/ 1	31.2kg	Pos. 2/ 3
Mat.	M000000001 Flour 405		
Target	30.0 kg		
Flour	C	-5.9	
Abort			

Automatic batching

W1	Max 300 kg	Min 2.0 kg	e=0.1 kg
W1		0.0 kg	
Tare		0.0 kg	
M000000004	Ammonium bicarbonate	AmBiCar	
M000000008	Butter	Butter	
M000000006	Caramel	Caramel	
M000000001	Flour 405	Flour	
M000000003	Salt	Salt	
M000000011	Sodium bicarbonate	Sodium	
M000000005	Vanilla	Vanilla	
M000000010	Water	Water	
M000000009	Whole milk powder	Whole n	
Exit			

Table of raw materials

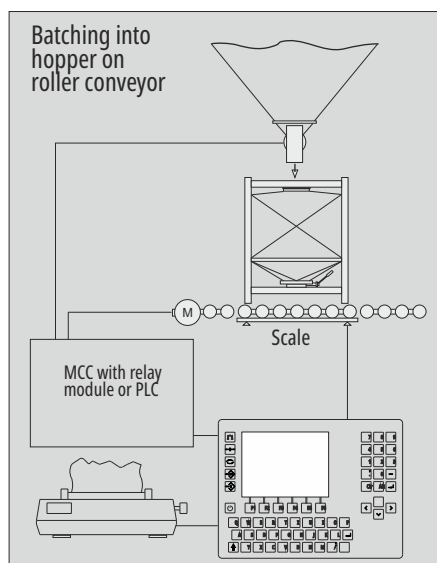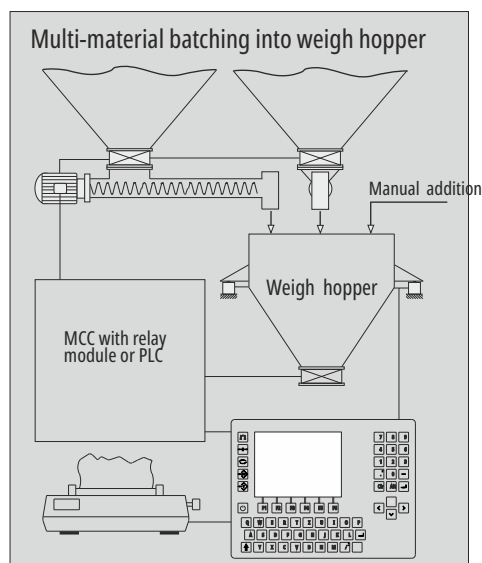


Typical sequence in automatic operation:

To start a batch, recipe number, batch size, number of batches and the start command are transferred to the IT6000E BATCH over Ethernet.

Information and actual weight over the Ethernet interface.

On completion of a batch, batch information is transferred to the host system.

Automatic operation is typically used when a number of batchweighers equipped with IT6000E BATCH controllers are employed.

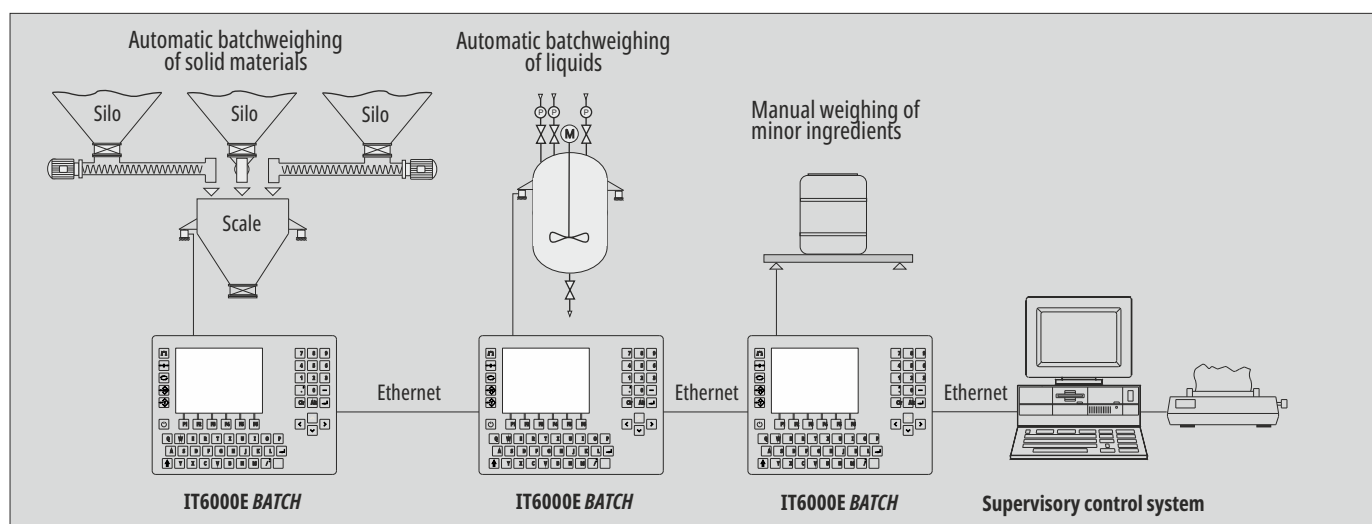


Recipes

- **Recipe database** with max. 100 recipes and max. 2,000 recipe lines
- **Capturing of production quantities** for each recipe
- **Each recipe line may have one of these functions:**
 - Automatic fill control
 - Manual additions
 - Subtractive weighing
 - Discharging
 - Zero check
 - Tare check
 - Confirm fixed value
 - Read data word
 - Write data word
 - Text prompts with operator acknowledgement
 - Synchronization step
 - Time preset
 - Control of mixer, heater, feeder etc.

Raw materials

- **Automatic batching** of up to 31 raw materials
- **Manual batchweighing** of further 269 materials
- **Parameter entry** of material number, name, preact value etc. for each raw material
- **Feeder assignment** (e.g. to silos) is configurable
- Capturing of raw material usage for each material.

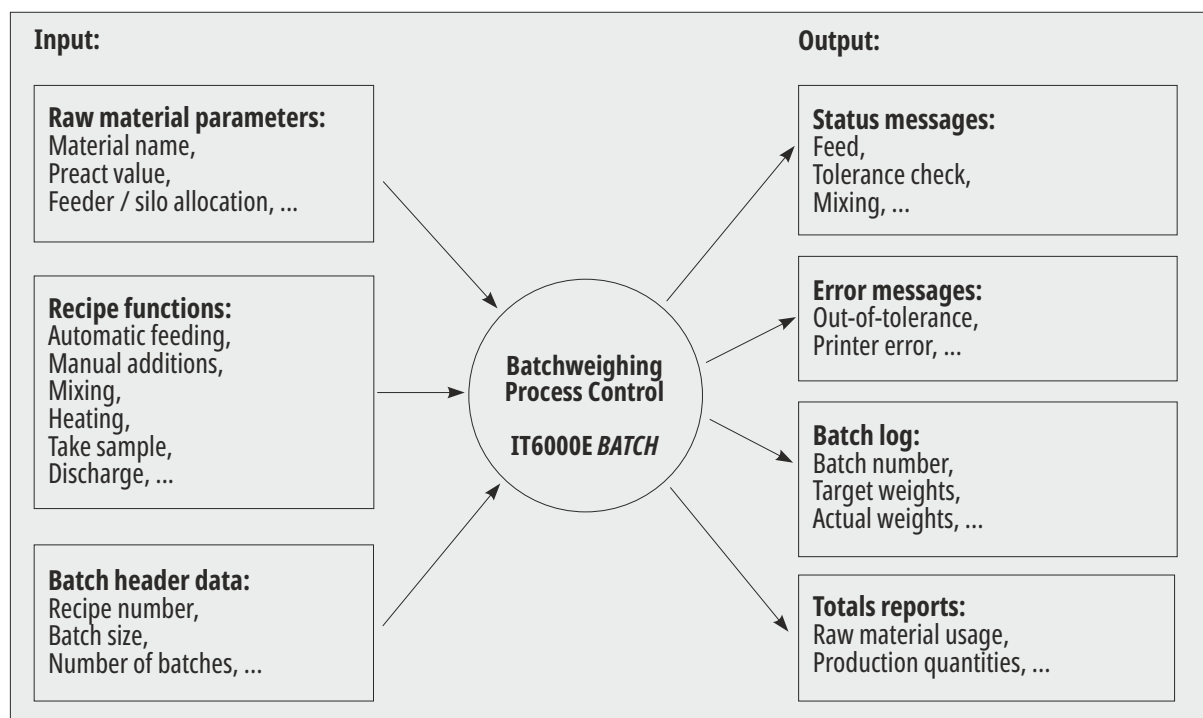**Typical batchweighing sequence for a mixer mounted on load cells**

- Zero check
- Automatic feeding of major materials with tolerance check and preact adjustment
- Manual addition of minor materials with tolerance check
- Mixing
- Wait for request signal
- Discharging
- Transfer and/or print batch log.

Typical example of a recipe batching sequence for a container on a roller-bed scale

- Zero check
- Move container onto scale
- Tare control
- Automatic feeding of materials with tolerance check and preact adjustment
- Move container off scale.

Feed control

- Fast and dribble feed with countdown display and tolerance check
- Automatic recalculation of target weights based on desired batch size
- Manual feeding with display of remaining target weight and bargraph display, with capturing of batch numbers
- Manual filling with change of item and horizontal weighing
- Automatic trend-sensing preact adjustment (selectable)
- Automatic top-up feed (jog) in the event of minus tolerance (selectable)
- Material flow check with violation alarm (selectable)
- Automatic intermediate discharge when batch size is larger than weighing range (selectable)
- Capturing of operator number.

Operation

- Operator is guided on a high-contrast color TFT display. Numeric keyboard with multiple key assignment for the entry of alphanumeric data, tactile acid-resistant membrane keyboard and softkeys or optional full-size PC keyboard
- Sequence and operation can be individually configured. This eliminates unnecessary operator steps.
- Input, printout and transfer of application-specific data, e.g. order number or batch number
- Operator prompting in English, German, French, Russian or Dutch, other languages on request.

Reporting

- Batch log
- Error messages
- Files, totals, parameters
- Logging on printer and/or to file (internal memory or external USB device)
- Data transmission to host.

Files

- Recipe file with 2,000 function entries (recipe lines)
- Raw material file with 100 entries
- Personnel file with 50 entries.

Simple integration

- Stand-alone or remote-controlled operation possible – material parameters, recipes etc. can be keyboard entered or downloaded
- Accept, Start, Interrupt functions are possible via external switches.

Weighing electronics

- Integrated signal amplifier to connect up to 2 scales with 8 strain gauge load cells each in 4- or 6-wire mode
- Two more scales can be connected via external ADCBox
- Calibration as single or multiple-range and as single or multi-interval scale
- Fast signal processing (50–800 updates / sec.)
- Weights and Measures approved resolution of 6,000 d with a max. preload of 80 %, internal resolution 524,000 d.

Operating temperature

–10 °C (+14 °F) to +40 °C (+104 °F), max. 95 % relative humidity, non-condensing.

Security

- Power-fail-safe data storage
- Power fail recovery, continuation of program possible after power failure
- Password protection for all data
- Battery-backed real-time clock
- Display, printout and transfer of all error messages is possible.

Ethernet interface (option: WLAN)

Connection to PC network via integrated Ethernet interface with configurable IP address, for data transmission to printer/PC (option), for communication with the host system or remote diagnosis over Internet.

Serial interfaces

- For printer (option)
- RS232, 20mA CL, RS422, RS485, selectable, protocol/baud rate configurable.

Integrated USB interface (option)

To connect printer, scanner, PC keyboard or to store weighing data on USB stick.

Parallel interfaces / Modbus TCP

- 4 internal opto-isolated inputs / outputs (24 V) or
- External relay modules to connect to MCCs / PLC or
- Connection to PLC or SCADA system over Modbus TCP (Slave).

Electrical connections

110 (–15 %) – 240 (+10 %) V AC;
50 / 60 Hz, option: 12–30 V DC,
power consumption max. 20 VA.

Accessories

Relay module with secure separation of inputs and outputs (24 V, 3 A).

Ex2/22 version

For installation in Ex zones 2 and 22.

Construction:

Desk/wall version



- Stainless steel housing, IP69K, NEMA 4X
- Dimension W x H x D: 330 x 239 x 134 mm (13.0" x 9.4" x 5.3")


Panel-mount version



- Stainless steel housing, fascia plate protected to IP69K, NEMA 4X
- Dimension W x H x D: 285 x 224 x 69 mm (11.2" x 8.8" x 2.7")
- Cutout in panel: 268 x 207 mm (10.6" x 8.1")

Display / operation:

Bargraph display



Manual weighing with bargraph display

Table of raw materials

W1	Max 300 kg	Min 2.0 kg	e-d= 0.1 kg
0.0 kg			
Tare 0.0 kg			
..Files\Raw materials 9/300			
Material-No.	000001		
Name	Flour 405		
Short name	Flour		
Feeder-No.	1		
Consumption	0.00kg		
Stock	1000.00kg		
Coarse preact	2.0000kg		
Print	Find	Delete	Info
Exit			

Maintenance of raw material file

Directives: 2014/30/EU, 2014/31/EU, 2014/35/EU

Standards: EN 45501, OIML R 76-1, EN 61000-6-2, EN 61000-6-4, NAMUR NE21, EN 62368-1

CE EU Type-examination Certificate as non-automatic weighing instrument

NTEP NTEP approval as indicating element

ETL ETL certified in accordance with UL 62368-1 and CSA C22.2 No. 62368-1

FC EMI compliance with FCC Part 15

Measurement Canada Measurement Canada: Approval as indicating element

UKCA Type-examination Certificate as non-automatic weighing instrument