



Electric Pallet Truck

EPT15-Li 

Electric Pallet Truck 1.5t



Electric Pallet Truck 1.5T


EPT15-Li

Distinguishing Mark				
1.1	Manufacturer			
1.2	Model			EPT15-Li
1.3	Type			Full Electric
1.4	Power Unit			Li-ion Battery
1.5	Operating Type			Pedestrian
1.6	Load Capacity	q	kg	1500
1.7	Load Center	c	mm	600
1.8	Axle centre to fork face	x	mm	950
1.9	Wheelbase	y	mm	1220(1295)
Weight				
2.1	Service Weight (With Battery)		kg	155/160
Tyres,Chassis				
3.1	Wheel Material			PU/PU
3.2	Tyre size, Loading wheels		mm	Ø80×70
3.3	Tyre size, Driving wheels		mm	Ø210×70
3.4	Tyre size, Caster wheels		mm	Ø70×36
3.5	Number of wheels driving, caster/ loading (x=driving)		psc	1x, 2/4
3.6	Track width, front, driving side	b10	mm	460
3.8	Track width, rear, loading side	b11	mm	400(520)
Dimensions				
4.4	Lift height	h3	mm	190
4.9	Height of tiller arm in driving position, min./max.	h14	mm	600/1220
4.15	Lowered height	h13	mm	85
4.19	Overall length	l1	mm	1540(1610)
4.20	Length to fork face	l2	mm	390
4.21	Overall width	b1	mm	560(680)
4.22	Fork dimensions	s/e/l	mm	50x160x1150(1220)
4.25	Distance between fork-arms	b5	mm	560(680)
4.32	Ground clearance, center of wheelbase	m2	mm	27
4.33	Aisle width for pallets 1000×1200 crossways	Ast	mm	1790
4.34	Aisle width for pallets 800×1200 lengthways	Ast	mm	1740
4.35	Turning radius	Wa	mm	1350
Performance				
5.1	Travel speed, laden/unladen		km/h	4.5
5.2	Lifting speed, laden/unladen		s	6.5/4.5
5.3	Lowering speed, laden/unladen		s	1.5/4.2
5.8	Max. gradeability, laden/unladen		%	3/5
5.10	Service brake			Electromagnetic
Electric-engine				
6.1	Driving motor rating S2 60 min		kW	0.75
6.2	Lifting motor rating S3 15%		kW	0.5
6.3	Battery type			Li-ion
6.4	Battery voltage/nominal capacity K20		V/Ah	24V/25Ah
6.5	Battery weight		kg	6.2
6.7	Charger		V/A	24V/10A
Others				
8.1	Type of driving control			DC
10.5	Steering type			Mechanical
10.7	Noise at the driver 's ears		dB(A)	<74
10.9	Application			General

1.The parameters in the table are of the standard model. For more infomation, please contact us.
2.The parameters are subject to change without notice.

EPT15-Li

Product Show

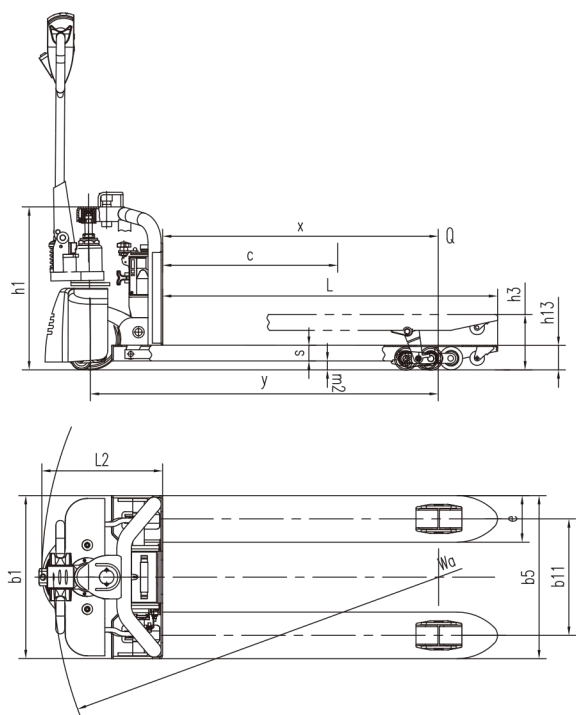

EPT15-Li

